



Solace LVT 12 Mil


Construction	Light Commercial	Luxury Vinyl Tile
Finish	Ceramic Bead	
		Metric
Product Dimensions	9.0 in. W x 60 in. L	22.86cm W x 152.4cm L
Wear Layer Thickness	12 mil (0.012 in)	0.3 mm
Overall Thickness	0.118 in.	3 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back Direct	
Installation	Glue	
Recommended Adhesive	LG4100 4G, S150-95, LOKWORX+ RESILI, 4151, LOKWORX+ RESILI or LokWorx Resilient, Pressulock	

Packaging

Pieces per Carton	10
Area per Carton	37.50 sqft
Weight per Carton	45 lbs



Recommended Installation Method

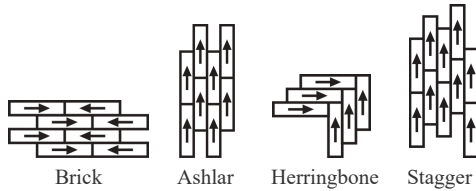

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Smoke Density (ASTM E662, Flaming Mode)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[10 Year Commercial Limited Warranty](#)
[Limited Lifetime Residential Warranty](#)